





MODEL ESVX-T EQUIPMENT SCREEN 2-5/8" Deep, Sightproof Vertical Blade

Standard Construction:




- Blades: .063" (1.5 mm) extruded aluminum (6063-T5), 2-5/8" (67 mm) deep and 5-3/4" (146 mm) on centers.
- Blade Angle: 90°
- Support: Special formed aluminum Z-Channel angle at top and bottom for mounting and blade stability. Consult factory for excessive wind loads.
- Corners: Non-Post Corners Standard
- Finish: Mill
- Maximum Size: 120" w x 84" h (3048 mm x 2134 mm) factory assembled sections. Screens which exceed this size will be shipped in sections for field assembly. Screens will be shipped in straight sides with corner assembly in the field.

Options:

- Corners: Post
- Finish: Prime Coat
- Baked Enamel
- Kynar
- Powder Coat
- Anodize – Clear or specified color
- Other - _____

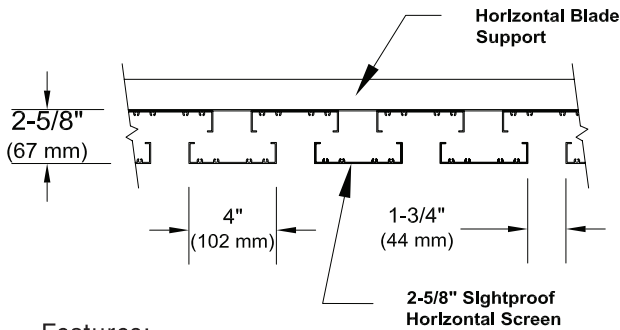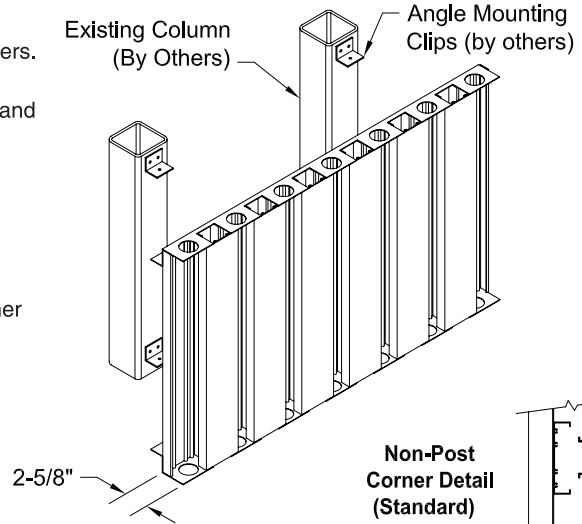

Continuous Line Detail



Features:

- The ESVX-T Equipment Screen gives a very attractive flat vertical line appearance. The sightproof blades prevent visual through openings.
- The extruded aluminum design allows of a long life, a low maintenance product, and high resistance to corrosion.
- The sightproof blade design produces a large free area to give an optimum airflow to the equipment and prevent the visual sight of it.
- The ESVX-T is an economical way to protect and hide equipment.

ESVX-T - 03-07

Suggested Specification:

Equipment Screens shall be Model: ESVX-T by NCA Manufacturing. Screens shall be furnished and installed as described in schedules or recommended by NCA Manufacturing. Screens shall be factory assembled except where shipment prohibits. When shipment prohibits, then factory components shall be shipped assembled for field assembly. The design shall incorporate the special Z-Channel angle to support the blade at the top and bottom. The special Z-Channel is to also to prevent visual openings and withstand wind loads of 20 psf (90 mph). Blades shall be a minimum thickness of .063" thick at 90° and spaced 5-3/4" on centers. Corners shall be or Post or Non-Post Design (specifier select one). Screens shall have architectural style look with continuous appearance with sightproof stationary vertical blades. Anchoring system shall be concealed thus not visible from exterior of screen. Screen finish shall be from NCA finish brochure.

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

© March, 2007 NCA Manf. Manufacturing

Project:

Contractor:

Location:

Address:

Architect:

P.O. Number:

Engineer:

Date:


NCA MANUFACTURING, INC. ■ 1036 SOUTH JUPITER ROAD ■ GARLAND, TEXAS 75042 ■ TEL. 972-276-5002 FAX 972-276-6747





MODEL ESVX-T EQUIPMENT SCREEN 2-5/8" Deep, Sightproof Vertical Blade

TYPICAL INSTALLATION DETAILS

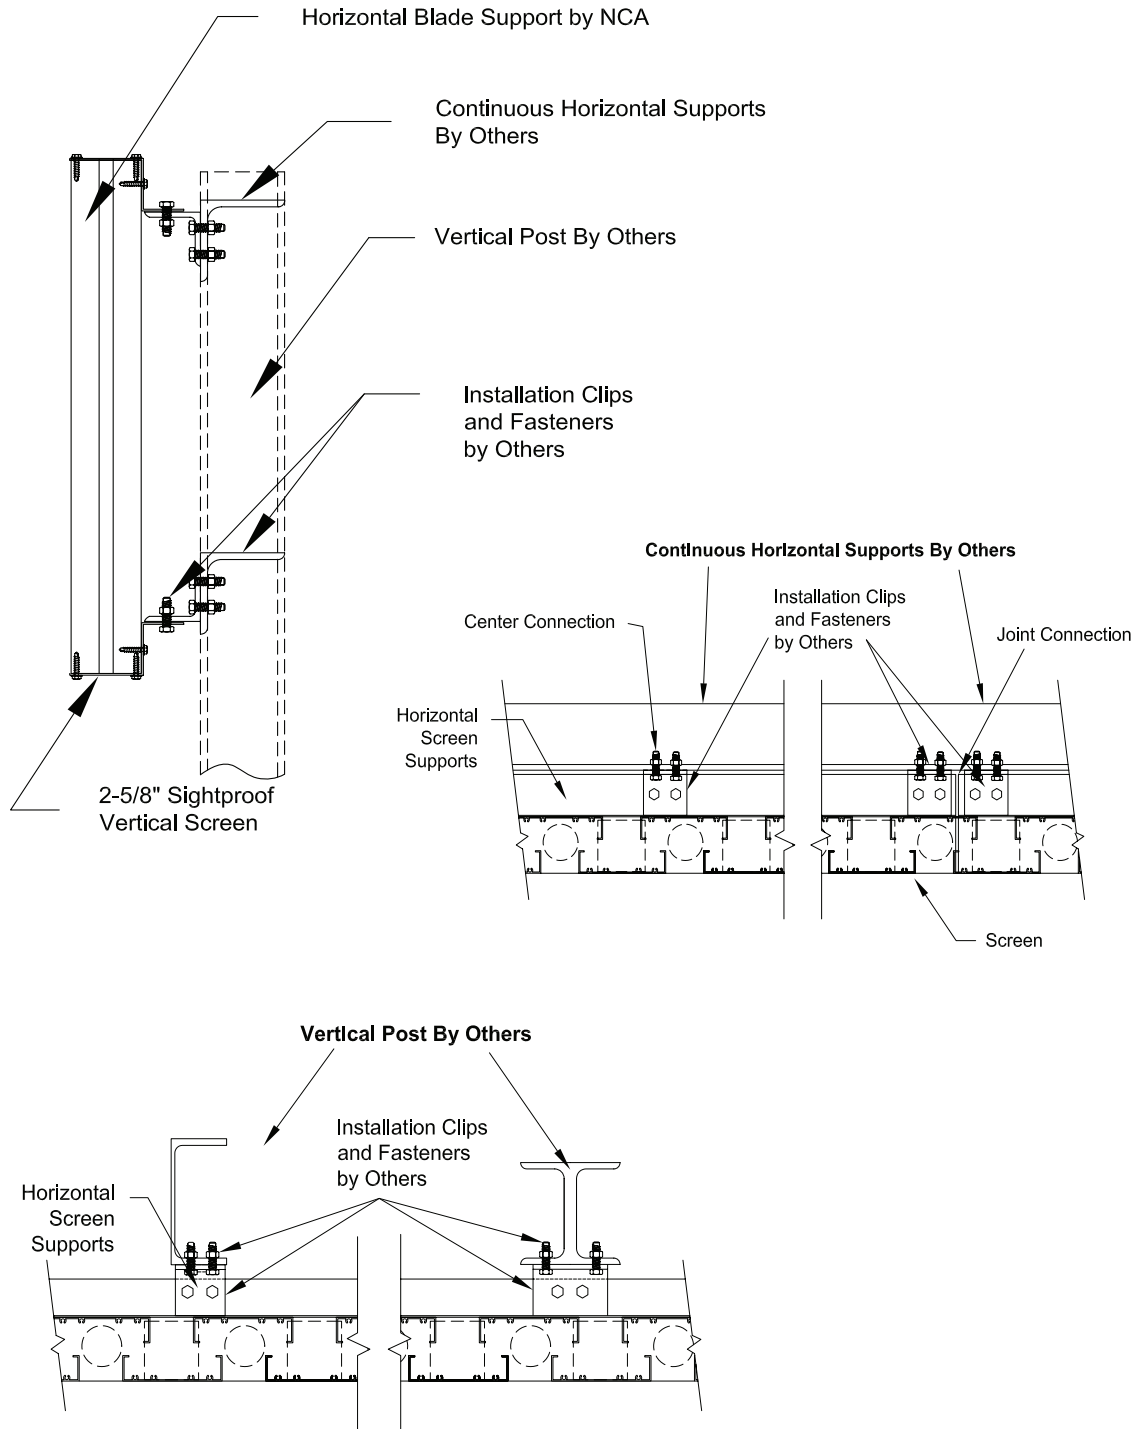

ESVX-T-03-07



© March, 2007 NCA Manf. Manufacturing

NCA MANUFACTURING, INC. ■ 1036 SOUTH JUPITER ROAD ■ GARLAND, TEXAS 75042 ■ TEL. 972-276-5002 FAX 972-276-6747

